

## HA20 RTJ HA20 RTJ PRO



### MAXIMUM PRODUCTIVITY

- > 360° continuous rotation (PRO model only)
- > 4 wheel steering for more agility (PRO model only)

### EXCELLENT ROUGH-TERRAIN CAPABILITIES

- > Climbing ramps up to 45%
- > Oscillating axle for a very good ground grip (PRO model)
- > Differential lock (hydraulic) to optimize crossing capacity

### OPTIMIZED COST OF OWNERSHIP

- > Simplified hydraulic architecture thanks to mechanical axles
- > Simple and reliable engine (>19kW, does not require a particulate filter)
- > Sherpal ready for maximized usage and to generate additional revenue (optional)

### OPTIMAL SAFETY

- > Haulotte Activ'Shield Bar: anti-crushing system (standard PRO model)
- > Haulotte Activ'Lighting System: load and unload the machine in low visibility conditions (standard PRO model)


# HA20 RTJ

# HA20 RTJ PRO

## ROUGH TERRAIN ARTICULATING BOOMS

### TECHNICAL DATA

|                                     | HA20 RTJ                                                  | HA20 RTJ PRO    |
|-------------------------------------|-----------------------------------------------------------|-----------------|
| Working height                      | 20.5 m                                                    |                 |
| Platform height                     | 18.5 m                                                    |                 |
| Horizontal outreach                 | 11.9 m                                                    |                 |
| Tailswing                           | 42 cm                                                     |                 |
| <b>A</b> Length - stowed            | 8.60 m                                                    |                 |
| <b>B</b> Width                      | 2.43 m                                                    |                 |
| <b>C</b> Storage / transport height | 2.98 m                                                    |                 |
| <b>D</b> Wheelbase                  | 2.5 m                                                     |                 |
| <b>E</b> Ground clearance - mini    | 30 cm                                                     |                 |
| <b>E</b> Ground clearance - maxi    | 36 cm                                                     |                 |
| <b>F</b> x <b>G</b> Platform size   | 1.80 x 0.8 m                                              |                 |
| <b>H</b> Storage / transport length | 6.16 m                                                    |                 |
| Tilt                                | 4° - option 6°                                            |                 |
| Platform rotation                   | 180° (+90° / -90°)                                        |                 |
| Turntable rotation                  | 355° non continuous                                       | 360° continuous |
| Up and over clearance               | 8.5 m                                                     |                 |
| Height - stowed                     | 2.47 m                                                    |                 |
| Lift capacity                       | 250 kg (2 pers.) - option 350 kg                          |                 |
| Drive speed                         | 0.5 - 5 km/h                                              |                 |
| Maximum wind speed rating           | 45 km/h                                                   |                 |
| Gradeability                        | 45 %                                                      |                 |
| Tyres - solid rough terrain         | 910 x 355 mm                                              |                 |
| Turning radius - outside            | 5,2 m                                                     |                 |
| Power source                        | KUBOTA, TIER 4 final : Stage V, China IV, Diesel: 18.5 kW |                 |
| Weight                              | 9 180 kg                                                  | 9 430 kg        |

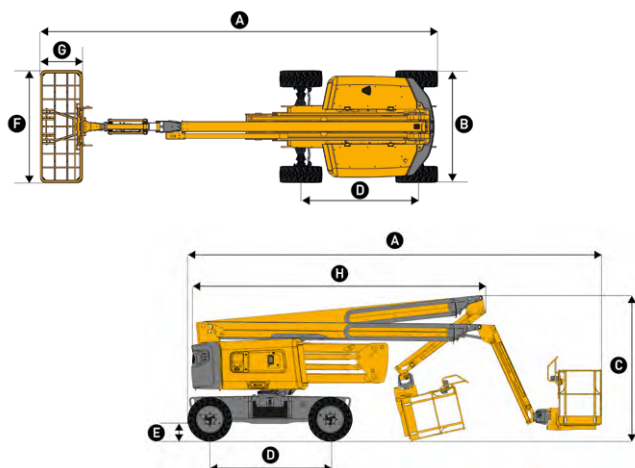

### STANDARD EQUIPMENT

- > Haulotte Activ'Shield Bar (standard PRO model)
- > Haulotte Activ'Lighting System (standard PRO model)
- > Haulotte Stop Emission System
- > Haulotte Activ'Screen
- > 4 wheel drive and 4 wheel steering (standard PRO model) / 4 wheel drive and 2 wheel steering (standard RTJ model)
- > Permanent limited slip differential
- > Oscillating axle (PRO model only)
- > 360° continuous rotation (PRO model only)
- > Simultaneous and proportional movements
- > Modular standard basket
- > Swing out engine tray for ease of maintenance
- > Access to the MyHaulotte multi-service portal
- > Universal telematic plug
- > 12 V battery / electrical control system
- > Rotating beacon
- > Upper control box protection cover

### OPTIONS AND ACCESSORIES

- > Haulotte Extra Reach
- > Hydraulic generator 3.5 Kw, 6Kw and 9Kw
- > USB port
- > Large basket 2.44 x 0.91 m
- > Swing door entry gate
- > Air line to platform
- > Cold weather kit
- > Glazier kit
- > Flashing light
- > Sherpal telematics subscription
- > Non-marking tires

