



HTA13P - HTT13P HTA16P - HTA19P


Access on the move

- Hydraulic outriggers and automatic leveling allow operation in under 30 seconds
- Superior combination of industry leading capacity and outreach
- Working heights from 12.7m to 18.7m


Exceptional productivity

- Air / water lines to the platform
- On-board generator with 240V power to the platform

HTT13 P

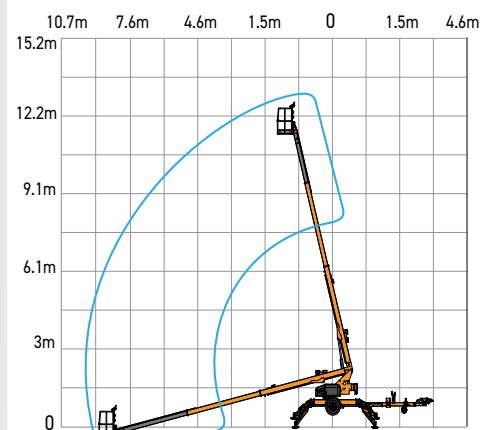

HTA13 P - HTA16 P - HTA19 P

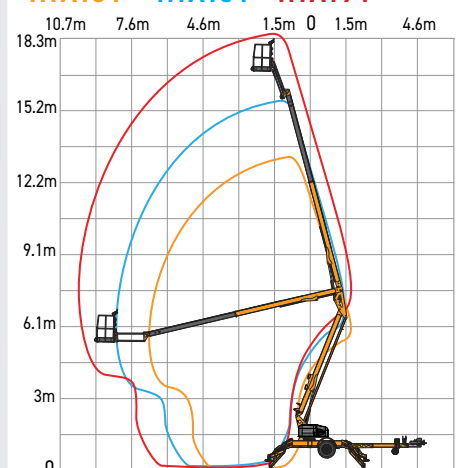



HTA13 P - HTT13 P - HTA16 P - HTA19 P

TRAILER MOUNTED BOOMS

TECHNICAL DATA

HTA13P

HTT13P

HTA16P

HTA19P

Working height	12.73m	13.26m	15.54m	18.67m
Platform height	10.9m	11.43m	13.72m	16.84m
Horizontal outreach (from centerline)	6.86 m	9.75 m	8.23 m	10.19m
Horizontal outreach (from edge of footpad)	5.31 m	8.23m	6.40 m	8.33 m
Up and over height	5.79m	N/A	6. 33m	7.04m
Lift capacity	227 kg			
A - Length - stowed	4.96m	6.68m	5.94m	6.99m
B - Width stowed		1.67m		1.70m
C - Height stowed		1.96 m		1.98m
D x E -Platform size	1.22 x 0.76m			
F - Widest Point	3.60m	4.19 m	4.19 m	4.47m
G - Widest Point	3.40m	4.11 m	4.11 m	4.57m
Turntable rotation	350° non-continuous			
Jib - length	1.3 m	N/A	1.3 m	
Jib - Vertical Motion	150° (+70 / -80)	N/A	150° (+70 / -80)	
Tow speed rating	105 km/h			
Leveling capability	12.5°			
Tyre size	ST 225/75D15		ST 225/75R15	
Power source	4 x 6V 245amp-hr			
Tongue weight (no options)	111 kg	91 kg	132 kg	152kg
Weight (no options)	1542kg	2014kg	1905kg	2177kg

STANDARD EQUIPMENT

- Hydraulic outriggers
- Automatic Levelling system
- Self-levelling platform
- Air and water line to platform
- On-board petrol generator
- 240V power to the platform
- Hydraulic surge brakes
- Spare Tyre
- Integrated forklift pockets
- Inboard 25 amp charger
- Hour meter and battery condition indicator

OPTIONS & ACCESSORIES

- Material Lifting hook
- Platform rotator (manual)
- Tool Tray
- Electric Brakes
- Fluorescent tube caddy

